




TEC-55 Multi-Point/Centrally Controlled Drain



A typical compressor installation has a compressor, aftercooler, dryer, filter(s) and a receiver (airtank). One unit, the **TEC-55**, electronically controls all draining points. This multi-voltage sequential controller can drain up to four outlets. The individual cycle requirements, as well as the overall time cycle, can be adjusted according to your specific requirements. The TEC-55 offers a range of valves specifically designed for filters, general purpose, high pressure or stainless steel.

- Number of Outlets - 4
- Load Capacity - 2A, 80 W per drain
- Interval Time - 0.5 - 10 seconds adjustable
- Total Cycle- 4.5 - 90 minutes adjustable
- Indicators- 6 LED's (only one LED active at any time)
- Output Connections- Cords with DIN43650A connectors
- Main Connections- Cord
- Housing- ABS, fire resistant

Dimensional Drawing

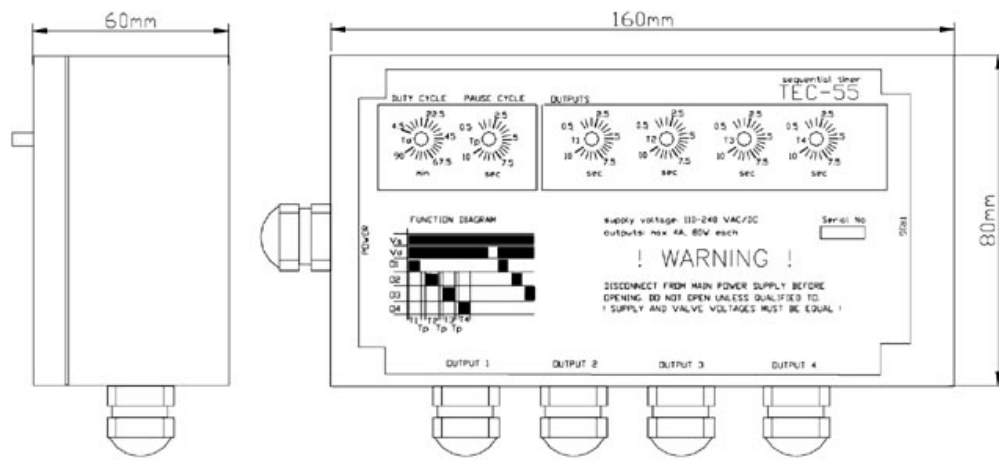

Specifications

Orifice Size	Depends on valve selected
Material	Brass/Stainless Steel
Size	1/4, 3/8, or 1/2 Inch
Supply Voltage	115 230 V AC/DC
Valve Open Cycle Time-Adjustable/Outlet	50/60 Hz 0.5 - 10 Seconds
Total Cycle- Adjustable	4.5 - 90 Minutes
Ambient Temperature	0 - 65 °C
Max. Pressure	230, 300, 600, 1200, 3625, 5000, 6000, or 7000 psi
Environmental Protection	IP65/NEMA 4 when installed
Housing Material	ABS, Fire Resistant

Note: Other pressures are available. Mixing of pressures using one controller is possible.

4421 Tradition Trail Plano TX 75093
 (972) 964-2700 or (800) 836-7472 • Fax (972) 964-2755
 Web www.isccompressedair.com • Email iscinfo@iscsales.com